

TUMBLE DRYERS

DX
RANGE

DX 25

DX 34

25KG
55LB

34KG
74LB



FEATURES

- Easy to use timer
- Electrical, Gas and Steam heating
- Large door opening for easy loading and unloading (Ø 68cm)
- Galvanized drum
- Radial airflow
- Large lint filter

OPTIONS

- Stainless steel drum
- Stainless steel front panel with black painted door
- Coin operated version
- Full OPL microprocessor
- Reversing drum
- Residual moisture control Sensodry+® (only with Full OPL microprocessor):
 - lower energy and utility costs
 - lower linen replacement costs
- SafeTech™ Fire Suppression System

senso.dry+

SafeTech™



FAST DRYING




EASY OPERATION




LARGE DOOR OPENING

TYPE		DX25	DX34
CAPACITY			
Capacity	kg	25	34
Drum volume	l	528	634
Drum diameter	mm	Ø 939	Ø 939
AIRFLOW			
50 Hz	l/s	354	354
60 Hz	l/s	354	434
DRYING AVERAGE			
Gas heating	g/min	453	616
Electric heating	g/min	399	381
MOTOR			
Non reversing	kW	0,373	0,560
Reversing (Fan+cylinder)	kW	2×0,249	2×0,249
GAS HEATING			
Energy	kW	38,1	48,3
Energy	kBTU/h	130	165
Electrical connection		1×200-240V 50/60Hz, 3×200-240V 50/60Hz 3×380-415V 50Hz, 3×380-415/440V 60Hz	
Gas connection	NPT	1/2"	1/2"
STEAM HEATING			
High pressure 6,9 bar	kW	52	61,6
	kBTU/h	178	210,3
Electrical connection		1×200-240V 50/60Hz, 3×200-240V 50/60Hz 3×380-415V 50Hz, 3×380-415/440V 60Hz	
Steam connection	NPT	3/4"	3/4"
ELECTRICAL HEATING			
Energy	kW	30	30
Electrical connection		3×200-240V 50/60Hz, 3×380-415 50Hz, 3×380-415/440V 60Hz	
EXHAUST	Ø /mm	203	203
DIMENSIONS			
Size H×W×D	mm	1946×981×1226	1946×981×1378
Net weight	kg	247	279
TRANSPORT DATA			
Packed H×W×D	mm	2057×1054×1323	2057×1054×1433
Gross weight	kg	273	307


Side DX 25 34

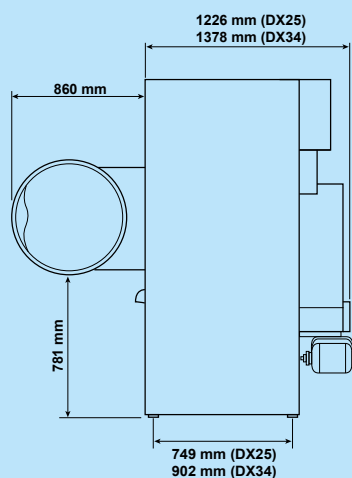


Back DX 25 34 Electric

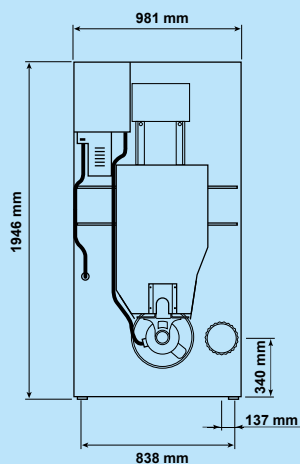

Back DX 25 34 Gas

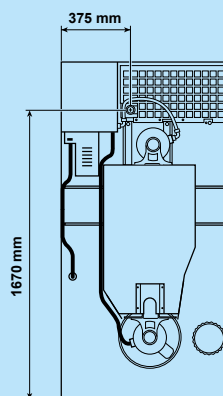

Back DX 25 34 Steam

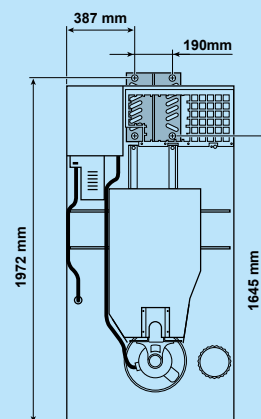

The company preserves the right to change the machines and the specification in this leaflet at any time, without prior notice. Details and photographs are only for information and never binding.

www.primuslaundry.com

Primus by Alliance Laundry Systems



12-2017