

## 3590EGT

3590EGT "GRAPHIC TOUCH": Touch Screen weight indicator for industrial applications



Digital weight indicator with a big touch screen display, suitable for advanced industrial applications. It allows the visualization of all the weighing data and the customization of the screens, simplifying the user operations. Fitted with 3 serial ports, transmission protocols for data communication, completely configurable printouts, integrated alibi memory, and port for connection to barcode/badge reader. CE-M approvable (OIML R-76 / EN 45501).

The best solution  
for advanced industrial  
applications

## MAIN FEATURES

- Backlit graphic display with touch screen technology, lxh= 120x90mm size.
- Multilanguage software.
- 15-key alphanumerical waterproof keyboard.
- 3-way control light.
- Selectable QWERTY, AZERTY o QWERTZ keyboard integrated in the touch screen.
- Stainless steel waterproof IP68 enclosure, new optional IP69K protection system.
- Dimensions: 280x143x185 mm.
- Suitable for use on the table, column, or wall.
- Real time clock and permanent data storage.
- Supplied with alibi memory, integrated on the motherboard.
- Slot for built-in micro SD for recording the configuration, logos, and customized screens (upon request).
- Functions available with DINI TOOLS utility
  - Configuration, data entry and print formatting.
  - Recording and filing of all the information on PC.
  - Complete retrieval of the configuration.
  - Instrument calibration with numeric values.
  - Customization of the screens.
- 24-bit A/D converter, 4 channels, up to 3200 conv./sec. and up to 8 signal linearisation points.
- 4 independent analogue channels (up to 2 in the E-AF03 version) for reading of the weight.
- Connection with up to 16 analogue load cells of 350 Ohm (45 load cells of 1000 Ohm) and with the main digital load cells available on the market (mod. E-AF03).
- Up to 10.000e OIML or 3 x 3000e @ 0,3  $\mu$ V/d CE-M legal for trade.
- Up to 1.000.000 displayable divisions for internal factory use, with internal resolution up to 3.000.000 points.
- Connectable to printers and labellers with free programming of the printout formats.
- 110-240 Vac power supply.

## MAIN CERTIFICATIONS

- EC Type Approval (EN45501)
- OIML R76
- OIML R51 - MID
- OIML R134 (AF09)

## APPLICATION SOFTWARE

- AEQ1: Totalization and formula weighing (integrated)
- AEQ2: Pieces/quantity counting (optional)
- AEQ3: Weighbridges - Input/Output vehicle (optional)
- AEQ4: Statistical checking of prepackaged goods (optional)
- AEQ5: Price computing and industrial labelling (optional)
- AEQ8: Wheel and axle static weighing with 2 or various platforms (optional)
- BATCH1: Single product dosage systems in loading and unloading (optional)

## CUSTOMISED APPLICATIONS

Thanks to our integrated development, you can create complete customised applications in autonomy:

- wizards, operator messages
- serial port management, protocols customization
- digital I/O full management
- sequential or simultaneous automations
- data entry, custom archives


Dini Argeo can offer the service of custom development programs.

## I/O SECTION

- 2 RS232 serial ports, for connection to printer, PC or PLC, radio module and optinal interfaces.
- 1 RS232 serial port (optional RS485), for connection to weight repeater, remote scale, badge reader or digital load cells.
- Fitted keyboard emulation input, for barcode/badge readers or external PC keyboard, through cable with mini DIN connector (optional).
- 4 optoisolated outputs (optional).
- 2 optoisolated inputs (optional).
- External Profibus interface (optional), for automation management.
- Modbus RTU Interface.
- Optional Bluetooth connection, for quick wireless programming of the activities and the formulas, through PC or tablet.
- Analog output DAC16O needs the expansion board IOEXPB and it's only compatible to a bench mounting.

## COMPLETELY CUSTOMIZABLE SCREENS

- Thanks to the programmable Touch Screen Display, you can create custom-made interfaces for any application:

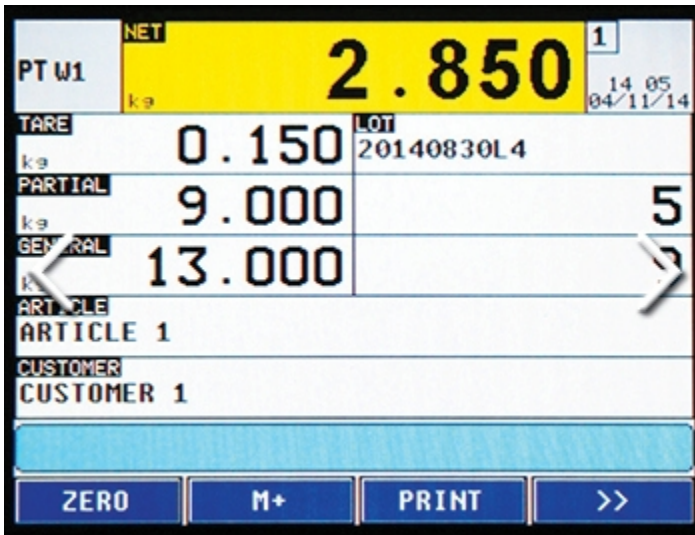

- The "Dini Display Tool" is a PC software which allows you to quickly customize the TOUCH SCREEN.



## DETAIL 1



3590EGT with IP65 INOX printer



www.diniargeo.com



“YOUR WORLDWIDE PARTNER FOR WEIGHING,”

**DINI ARGEO**  
**FRANCE sarl**  
Nogent-sur-Marne  
info.fr@diniargeo.com

**DINI ARGEO**  
**GMBH**  
Sinsheim - Germany  
info.de@diniargeo.com

**DINI ARGEO**  
**UK Ltd**  
Taunton - United Kingdom  
info.uk@diniargeo.com

**DINI ARGEO WEIGHING**  
**INSTRUMENTS Ltd**  
Shanghai - China  
info.cn@diniargeo.com

**DINI ARGEO**  
**WEIGHBRIDGES**  
Calto (RO) – Italy  
info@diniargeo.com



**HEAD OFFICE**

Via Della Fisica, 20  
41042 Spezzano di Fiorano Modena - Italy  
Tel. +39.0536 843418 Fax. +39.0536 843521  
info@diniargeo.com

**SERVICE ASSISTANCE**

Via Dell'Elettronica, 15  
41042 Spezzano di Fiorano Modena - Italy  
Tel. +39.0536 921784 Fax. +39.0536 926654  
service@diniargeo.com



SALES AND TECHNICAL ASSISTANCE SERVICE