

HIGH SPIN HYGIENIC BARRIER WASHER EXTRACTORS

MB
RANGE

MB 26 MB 33 MB 44 MB 66

26KG 33KG 44KG 66KG
60LB 75LB 100LB 150LB



FEATURES

- Freestanding, high spin
- Oversized frame, bearings and drum
- Large drain valve 2x Ø 76 mm
- Easy access to all parts
- Frequency controlled motor
- Large door opening for easy loading and unloading.
- Graphitronic® - new graphic display with almost unlimited possibilities as:
 - Communication interface enabling remote service
 - Multilingual microprocessor
 - Freely programmable
- PowerWash® perforated lifting ribs: better washing results, lower water consumption
- SuperEco washing programmes - significantly reduces water and electricity consumption
- Patented soap dispenser with 5 removable compartments

OPTIONS

- Stainless steel cabinet
- Liquid soap pumps
- SoftWash® (wet cleaning) version
- Opti-load® linen weighing and waterconsumption optimization system
- Trace-Tech® traceability software and networking system



HYGIENIC
SOLUTION



LARGE DOOR
OPENING



EASY
OPERATION

OPTILOAD

TRACE-TECH

POWERWASH


Graphitronic®

supereco
washing programmes


TYPE		MB26	MB33	MB44	MB66
CAPACITY					
Drum capacity	kg/lb	26/60	33/75	44/100	66/150
Drum volume	l	265	332	442	663
Drum diameter	mm	Ø 650	Ø 650	Ø 750	2xØ 750
Number of drums		1	1	1	2
Number of loading doors		1	1	1	2
Number of unloading doors		1	1	1	2
DRUM SPEED					
Wash speed	rpm	45	45	41	41
Spin speed	rpm	960	960	915	915
G-Factor		335	335	350	350
PROGRAMMER					
Graphitronic® microprocessor		standard	standard	standard	standard
CABINET					
Stainless steel		option	option	option	option
HEATING					
Electrical	kW	24	36	45	54
Steam heating	bar	3-8	3-8	3-8	3-8
CONNECTION					
Electrical		3x200-240V 50/60Hz 3x380-480V 50/60Hz			
Water inlet		1"			
Steam inlet		3/4"			
DIMENSIONS					
H×W×D	mm	1600x1410x1060	1600x1560x1060	1650x1610x1170	1650x2160x1170
Net weight	kg	960	1000	1140	1360
TRANSPORT DATA					
Packed H×W×D	mm	1840x1465x1175	1840x1610x1175	1840x1660x1380	1840x2200x1380
Gross weight	kg	1070	1090	1280	1510
WATER CONSUMPTION					
Cold and hot water per cycle*	l	276 + 69	364 + 91	467 + 117	785 + 195

* Tested in accordance of EN 604 56 norm, The data concerning dimensions of machines include all extended parts


FRONT MB 26 33 44




SIDE MB 26 33 44 66

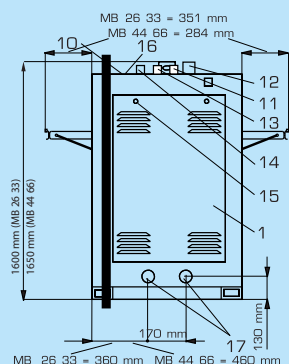

BACK MB 26 33 44



BACK MB 66

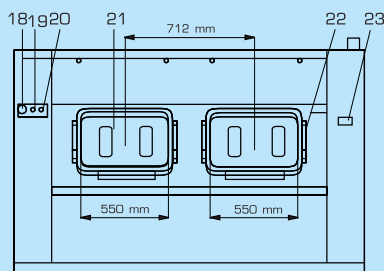

1. Service panel
2. Powder tank
3. Loading door
4. Door handle
5. Display
6. Keyboard
7. Main switch
8. Button to unlock the door
9. Button for the door position
10. Inlet for liquid soap
11. Inlet for warm water
12. Drum ventilation
13. Inlet for hard cold water
14. Inlet for soft cold water
15. Lock service panel
16. Steam supply (version with steam heating)
17. Drain 2x3" (76mm)
18. Emergency button
19. Button to unlock the door
20. Button for the door position
21. Unloading door
22. Consolidation of the door
23. Net plate

WATCH
HYGIENE VIDEO
www.bit.ly/primushygiene



The company preserves the right to change the machines and the specification in this leaflet at any time, without prior notice. Details and photographs are only for information and never binding.

www.primuslaundry.com

Primus by Alliance Laundry Systems



12-2017